

# BA4112

# FM-IF detector

The BA4112 IC is a narrow band FM-IF detection IC that is designed to be used in FM transceivers.

## Features


- available in a DIP16 package that is compatible with Motorola part no. MC3357P
- low power consumption (typically 3.0 mA)
- limiting sensitivity is typically  $-3$  dB at  $5.0 \mu\text{V}$
- circuit between 2nd mixer and detector output requires few external components, which allows smaller transceiver sizes

## Applications


- VHF-band FM transceivers
- cordless telephones

## Dimensions (Units : mm)

BA4112 (DIP16)

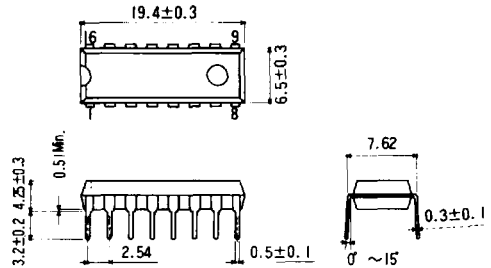

## Block diagram

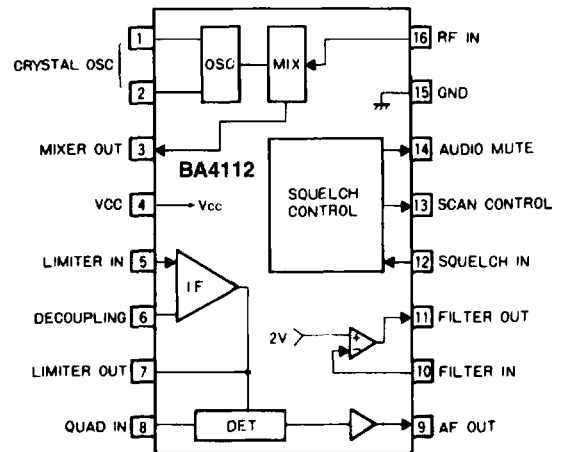

**Absolute maximum ratings ( $T_a = 25^\circ\text{C}$ )**

Parameter	Symbol	Limits	Unit	Conditions
Power supply voltage	$V_{CC}$	12	V	
Power dissipation	$P_d$	500	mW	Reduce power by 5 mW/ $^\circ\text{C}$ for each degree above 25 $^\circ\text{C}$ .
Operating temperature	$T_{opr}$	-10 ~ +60	$^\circ\text{C}$	
Storage temperature	$T_{stg}$	-25 ~ +75	$^\circ\text{C}$	

**Electrical characteristics (unless otherwise noted,  $T_a = 25^\circ\text{C}$ ,  $V_{CC} = 6.0\text{ V}$ ,  $f_{IN} = 10.7\text{ MHz}$ ,  $\Delta f = \pm 3\text{ kHz}$ ,  $f_m = 1\text{ kHz}$ )**

Parameter	Symbol	Min	Typical	Max	Unit	Conditions
Quiescent current	$I_Q$	2.0	3.0	5.0	mA	No signal, squelch on
20 dB signal/noise sensitivity	20 dB S/N	15	-20	25	dB $\mu\text{V}$	
Detector output level	$V_{ODC}$	250	350	500	mV	$V_{IN} = 80\text{ dB}\mu\text{V}$
Detector output distortion	THD		1.8	3.0	%	$V_{IN} = 80\text{ dB}\mu\text{V}$
Detector output DC voltage	$V_{ODC}$	2.0	3.0	4.0	V	$V_{IN} = 0\text{ V}$
Detector output impedance	$Z_{OUT}$	280	400	520	$\Omega$	
Filter amplifier gain	$G_V$	41	46		dB	$V_{IN} = 1\text{ mV } 10\text{ kHz}$
Filter output DC voltage	$V_{ODC-f}$	1.5	2.0	2.5	V	
Squelch hysteresis	Hys	50	100	150	mV	
Mute low resistance	$R_{mL}$		10	50	$\Omega$	$V_{12} = \text{GND}$
Mute high resistance	$R_{mH}$	1.0	10		M $\Omega$	$V_{12} = 2.0\text{ V}$
Scan low voltage	$V_{ScL}$		0	0.5	V	$V_{12} = 2.0\text{ V}$
Scan high voltage	$V_{ScH}$	3.0	5.0	5.9	V	$V_{12} = \text{GND}$
Mixer conversion gain	$A_{vm}$	17	20		dB	$f_{IN} = 10.7\text{ MHz}$

**Note:** For the test circuit, see Figure 1

Figure 1 Test circuit

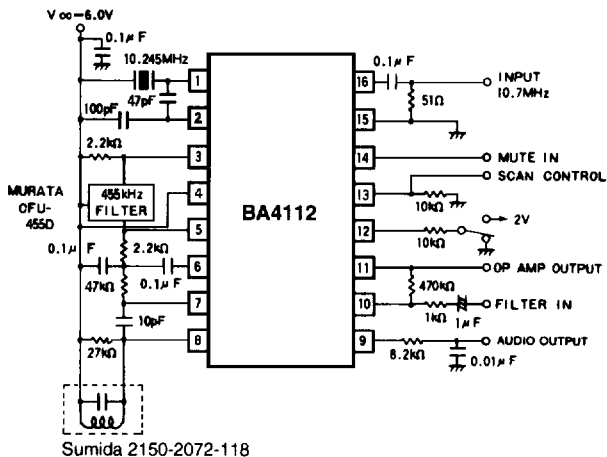


Figure 2 Application example

