


To convert the Lincoln to 11 Meter operation:

Remove the cover on the speaker side of the radio..

Locate the the Microprocessor on the SYNTH PCB.

Tie a jumper wire from the thru plate via hole at the end of the trace the bare end of the 10K ohm Resistor. (see diagram) or connect pins 34 & 35 together..

Lincoln Frequency Conversion

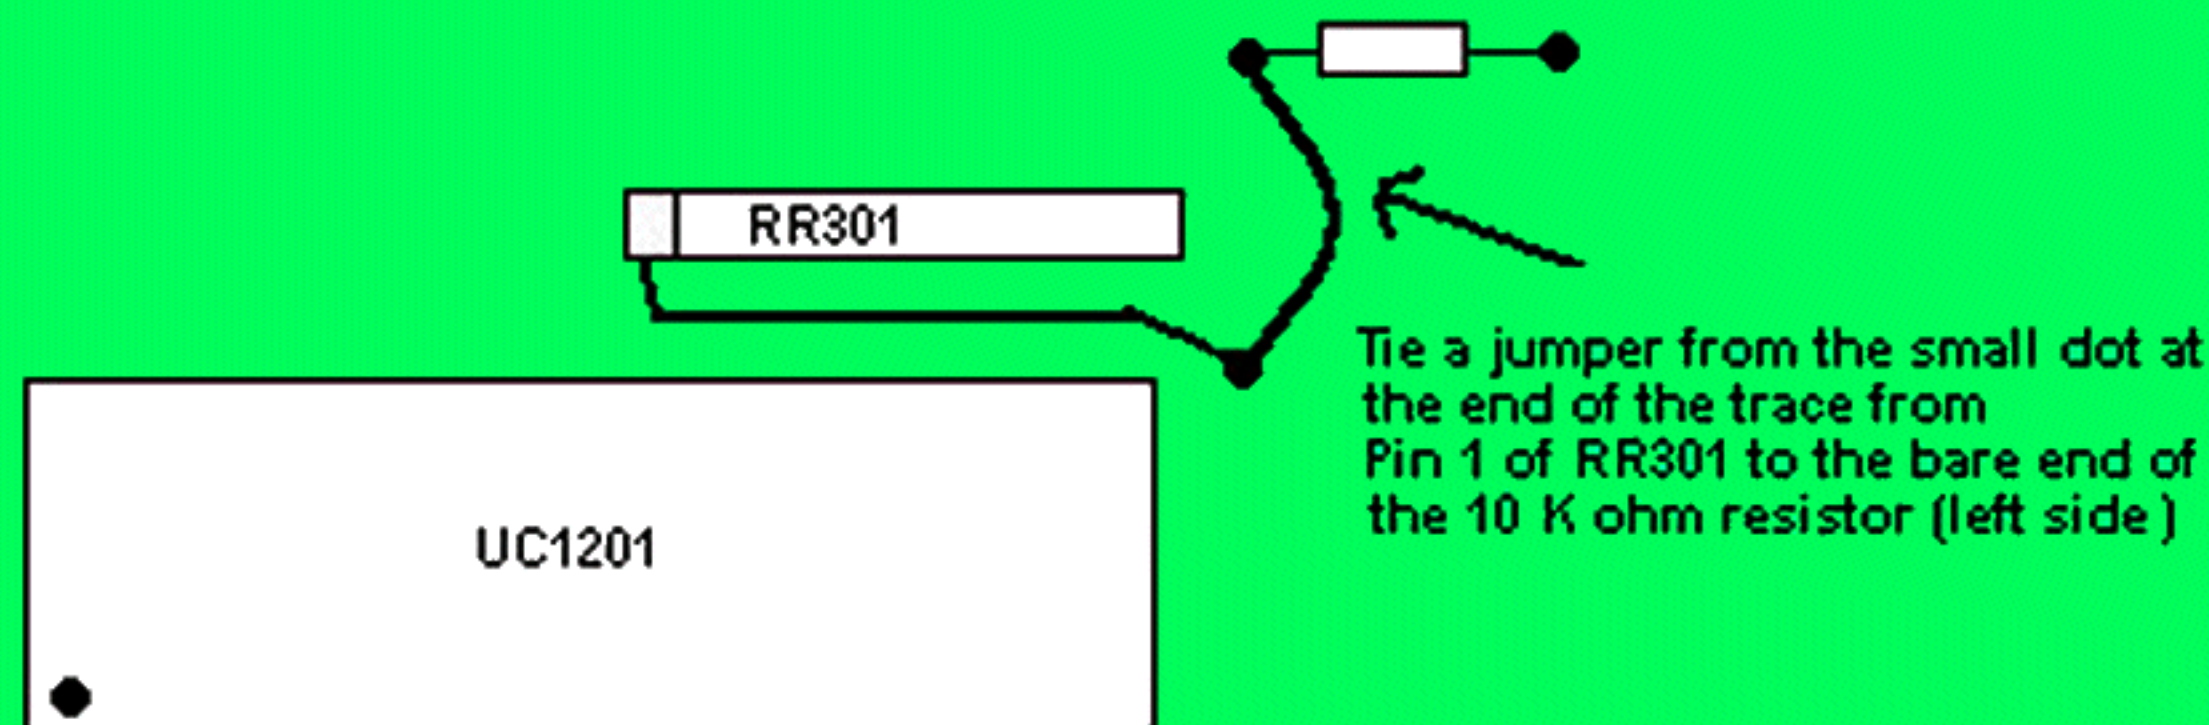

(Top side of Synth PCB)

Another mod suggests soldeing a jumper between pins 34 and 35, this will do the same thing. This mod will open the frequency coverage from 26.000 MHz to 29.999 MHz.