


SCHEMATIC DIAGRAM

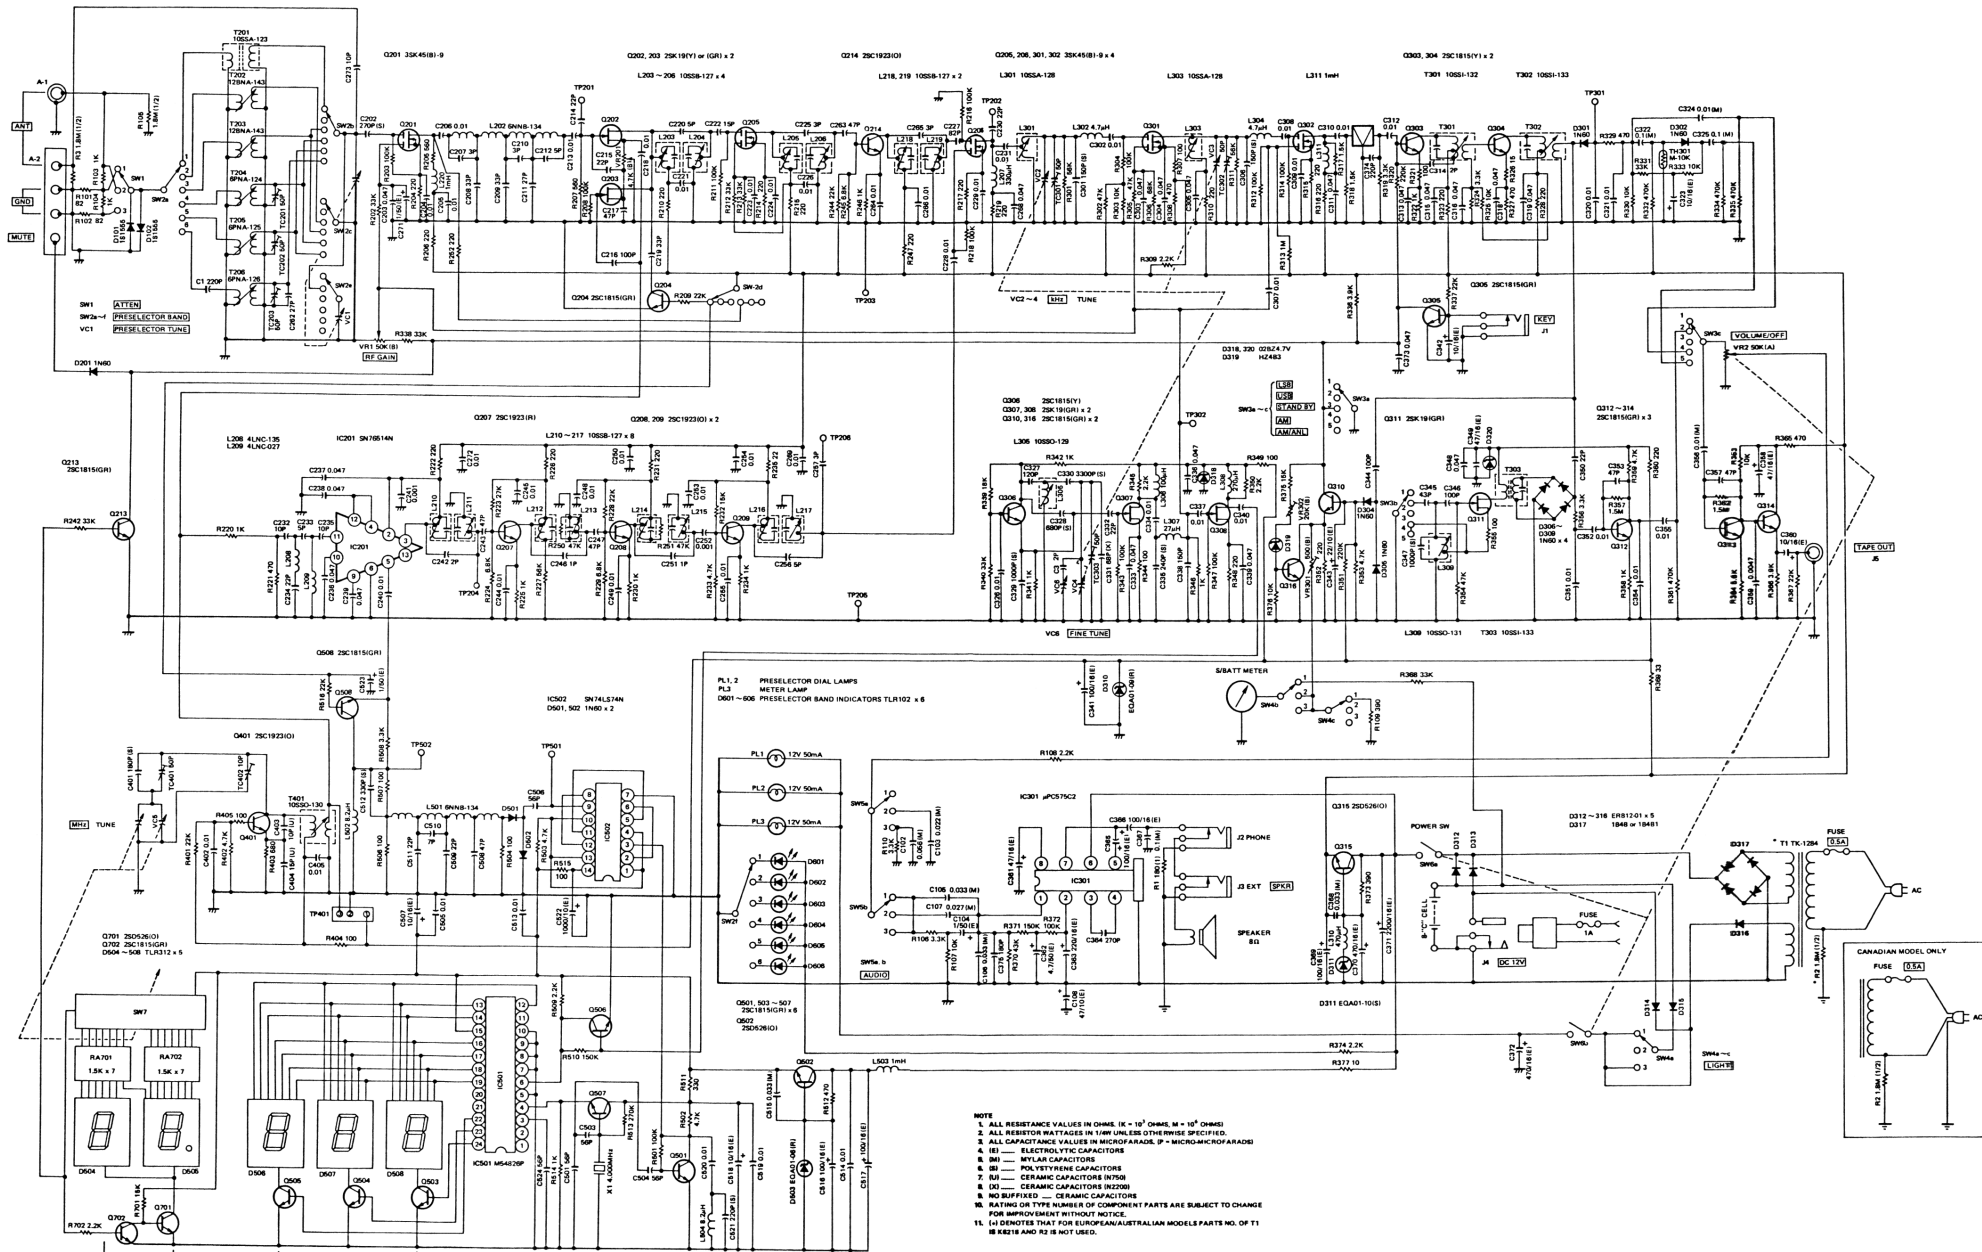

NOTE

1. ALL RESISTANCE VALUES IN OHMS IK = 10^3 OHMS, M = 10^6 OHMS
2. ALL RESISTOR WATTAGES IN 1/4W UNLESS OTHERWISE SPECIFIED
3. ALL CAPACITANCE VALUES IN MICROFARADS, P = MICRO/MICROFARADS
4. (E) = ELECTROLYTIC CAPACITORS
5. (M) = MYLAR CAPACITORS
6. (S) = POLYSTYRENE CAPACITORS
7. (P) = PAPER CAPACITORS
8. (C) = CERAMIC CAPACITORS (NP200)
9. (N) = CERAMIC CAPACITORS (N200)
10. NO SUFFIXES — CERAMIC CAPACITORS
11. RATING OR TYPE NUMBER OF COMPONENT PARTS ARE SUBJECT TO CHANGE FOR IMPROVEMENT WITHOUT NOTICE
12. (L) DENOTES THAT FOR EUROPEAN/AUSTRALIAN MODELS PARTS NO. T1 IS R218 AND R2 IS NOT USED.

Scanned by J. Shorney, NU0C, 9/2008
For free distribution only