

Uniden®

LRD950 LONG RANGE Radar/Laser Detector

Detailed User's Manual



CUSTOMER CARE

At Uniden®, we care about you!

If you need assistance, please do NOT return this product to your place of purchase. Our customer care specialists are available to serve you.

Save your receipt/proof of purchase for warranty.

Quickly find answers to your questions by:

1. Reading your owner's manual, included with this product.
2. Visiting our customer support website at www.uniden.com.
3. Calling our customer care specialists at 1-800-297-1023.

Images in this manual may differ slightly from your actual product.

DISCLAIMER: Radar detectors are illegal in some states. Some states prohibit mounting any object on your windshield. Check applicable law in your state and any state in which you use the product to verify that using and mounting a radar detector is legal. Uniden radar detectors are not manufactured and/or sold with the intent to be used for illegal purposes. Drive safely and exercise caution while using this product. Do not change settings of the product while driving. Uniden expects consumer's use of these products to be in compliance with all local, state, and federal law. Uniden expressly disclaims any liability arising out of or related to your use of this product.

CONTENTS

LRD950 OVERVIEW	5
FEATURES.....	5
INSTALL AND TURN ON LRD950.....	6
INSTALL.....	6
Windshield	6
Dashboard.....	6
TURN ON	6
WHAT'S IN THE BOX	6
PARTS OF THE LRD950	7
NON-KEY ELEMENTS	8
MENU SYSTEM.....	8
BASIC OPERATIONS	10
FEATURE DETAILS	11
USER MARKS (LASER AND RADAR SITES)	11
HIGHWAY VS CITY MODE	11
POP MODE.....	11
SCAN DISPLAY	11
ALARM PRIORITIES.....	11
MUTE MEMORY	12
MAINTENANCE.....	12
MAINTAINING THE EQUIPMENT	12
UPDATING THE FIRMWARE/DATABASE	12
TROUBLESHOOTING.....	13
SPECIFICATIONS	13
ONE-YEAR LIMITED WARRANTY	14



UNIDEN
LONG RANGE RADAR/LASER DETECTOR
DETAILED USER'S MANUAL
LRD950

LRD950 OVERVIEW

The LRD950 is a top of the line Radar Detector with a built-in GPS feature. With the LRD950, you can mark geographical points where you commonly encounter radar transmissions. These can be school zones, red-light cameras, and places where police frequently monitor traffic. You can mark these points so the detector will announce "User mark ahead" when you approach them. Among other announcements, the Voice Notification feature lets you know when you are approaching a radar and what type of radar it is (red light, speed, etc).

FEATURES

- Super Long Range Laser Radar Detection
- Voice Notifications
- Radar band frequency displays
- GPS for Red Light and Speed camera locations
- Easy to read OLED display
- User Mark set and voice notification
- Advanced K band filter
- Spectre I and IV undetectable
- Signal Strength Meter displays Current Speed, Compass, Vehicle Battery Voltage, Altitude, and Clock
- Max. Speed Warning System

INSTALL AND TURN ON LRD950

You can mount the LRD950 on the windshield (bracket included) or on the dashboard (hook and loop tape included).

INSTALL

Windshield

When you mount the LRD950 on the windshield, mount it in the middle of the windshield between the driver and passenger. Be sure there are no obstructions and that there is a clear view through the back window.

1. Attach the rubber suction cups to the bracket and push the cups firmly onto the windshield.
2. Slide the unit onto the bracket until it clicks into place.
3. Plug the power cord into the LRD950 and plug the cigarette lighter adapter into the vehicle's cigarette lighter.
4. The LRD950 automatically turns on and runs through a self test cycle.

Release the LRD950 from the bracket by pressing the Eject key on top of the detector.

Dashboard

The same types of mounting requirements for the windshield apply for mounting the unit on the dashboard.




1. Attach the unit to the dashboard using the hook and eye fastener tape.
2. Plug the power cord into the LRD950 and plug the cigarette lighter adapter into the vehicle's cigarette lighter.
3. The LRD950 automatically turns on and runs through a self test cycle.

Pull the bracket from the dashboard, separating the hook and loop tape.


TURN ON

1. Inert the power cord's RJ45 connector into the LRD950s power jack.
2. Insert the power cord's cigarette lighter adapter into the vehicle's cigarette lighter port.
3. The LRD950 automatically turns on and runs through a systems check.

WHAT'S IN THE BOX

	
<p>LRD950 Radar Detector</p>	<p>12V DC Power Cord with RJ45 Connection</p>
	<p>Not Shown:</p> <p>Hook and Loop Fastener Tape Spare Fuse for DC Power Cord Quick Start Guide</p>
<p>Windshield Mounting Bracket</p>	

PARTS OF THE LRD950

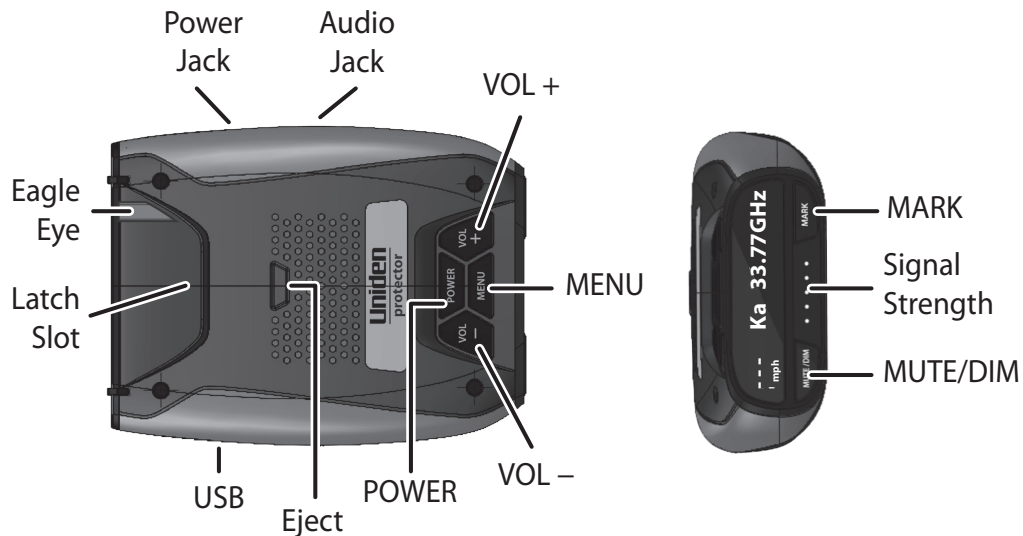

KEY	PRESS TO...	PRESS AND HOLD TO...
POWER	Turn LRD950 on and off.	NA
VOL +	<ul style="list-style-type: none"> Turn volume up (7 levels: 0 - 6). In Menus, go to next item. 	Press and hold both VOL + and VOL - to change modes between HIGHWAY and CITY.
VOL -	<ul style="list-style-type: none"> Turn volume down (6 levels). In Menus, go to previous item. 	
MENU	<ul style="list-style-type: none"> Access the Menu system. In the Menu system, press to cycle through options for the current menu item. 	Exit the Menu system.
MUTE/DIM	<p>MUTE</p> <ul style="list-style-type: none"> MUTE on - Press MUTE/DIM to mute an alarm. Returns to normal operation 10 seconds after the alert ends or if a different band is detected during Mute mode. <i>Mute On</i> displays for a few seconds. MUTE off - Press MUTE/DIM to restore audible alarms before the 10 second automatic mute time-out. <p>MUTE MEMORY</p> <ul style="list-style-type: none"> Save a Mute location (Mute Memory) - press MUTE/DIM again while <i>Mute On</i> displays to save that GPS location and frequency to memory. <i>Mute Memory</i> displays on the screen. <p>LRD950 stores up to 100 Mute Memory points.</p> <ul style="list-style-type: none"> Delete Mute Memory - Press MUTE/DIM while <i>Mute Memory</i> displays; the LRD950 displays a delete confirmation message. Press MUTE/DIM again to confirm. 	<p>DIM - Changes the backlight intensity:</p> <ul style="list-style-type: none"> Bright Dim Dark

KEY	PRESS TO...	PRESS AND HOLD TO...
MARK	<p>User Mark. A User Mark is a manually tagged geographic location where an alarm is usually found. The LRD950 alerts when close to these User marks.</p> <ul style="list-style-type: none"> • Add - Press MARK when you are at the alarm location. • Delete <p>An error message displays/sounds if memory is full or there is a GPS error.</p>	Delete all User Marks.

NON-KEY ELEMENTS

ELEMENT	WHAT IT DOES
Eagle Eye	Provides a 360° monitoring radius.
Latch Slot	Insert the bracket latch into this slot.
Mini USB	Provides PC connection for data updates.
Audio Jack	Plug in headset.
Eject	Press to release the bracket latch.
Power Jack	Plug the 12V Power Cord here.
Signal Strength	Displays how strong the signal received is (5 levels).

MENU SYSTEM

Menus let you set up the system to your own requirements. You can select the backlight brightness level, turn different bands on and off, and set specific items such as speed or auto mute.

Press **MENU** to access the Menu system. The screen displays the selection's current status. For example, if you press **MENU** and the screen displays *Voice: ON*, you have the option of turning Voice to OFF.

Use the following keys to navigate the menus:

- **MENU**: Change a menu item setting (press and hold to exit the Menu system).
- **VOL +** : Go to the next Menu item.
- **VOL -** : Go to the previous Menu item.

MENU ITEM	WHAT IT DOES	SETTINGS
GPS	Determines your geographic location.	On Off
Speed Camera Alarm	Notifies you if any speed cameras are nearby. Only displays if GPS setting = ON	On Off
Red Light Camera Alarm	Notifies you if any red light cameras are nearby. Only displays if GPS setting = ON.	On Off
Voice	Turns voice alert on or off under the following conditions: <ul style="list-style-type: none"> • Type of radar/laser • Band alarms 	On Off
X Band	Turn off to have the detector ignore X Band frequencies (Highway only).	On Off
K Band	Turn off to have the detector ignore K Band frequencies.	On Off

MENU ITEM	WHAT IT DOES	SETTINGS
Ka Band	Turn off to have the detector ignore Ka Band frequencies.	On Off
Laser	Turn off to have the detector ignore lasers.	
POP Mode	Detects POP transmissions (very brief transmissions, too fast for some detectors to hear).	On Off
K Filter	Filters noise from the K band to prevent false detections.	On Off
Scan	If Scan is turned on, a dot displays and moves back and forth on the screen to indicate scanning status..	On Off
Display	Lets you set the following:	
	• Speed	mph, km/h
	• Compass (8 points)	NW, W, etc
	• Voltage	V
	• Altitude	m, ft.
• Off		
Speed Unit	Sets the speed measurement type.	Miles per Hour (mph) Kilometers per hour (KPH)
Auto Mute	Auto Mute reduces alarm level to 1 after 3 seconds and returns to normal operation (Auto Mute = OFF) 10 seconds after the alert ends. If the same or another alarm sounds within the 10 second period, Auto Mute remains at level 1. The unit returns to normal operation (Auto Mute = OFF) if a different band is detected during Auto Mute = ON mode.	On Off
Backlight	Turns the backlight on and off. <i>Press and hold MUTE/DIM to select a brightness level.</i>	On Off
Quiet Ride	Mutes laser and radar alarms when you drive under the speed limit you set here.	5 to 50 in 5 mph (10 to 80 in 10 kp/h) intervals
Limit Speed	Sounds an alarm when the vehicle reaches a specific speed.	50 to 100 in 5 mph (80 to 160 in 10 kp/h) intervals
GMT	Sets time zone according to Greenwich Mean Time (GMT).	Most common time zone settings for North America are: <ul style="list-style-type: none"> • GMT-05:00 - Eastern Standard • GMT-06:00 - Central Standard • GMT-07:00 - Mountain Standard • GMT-08:00 - Pacific Standard • GMT-09:00 - Yukon Standard • GMT-10:00 - Alaska-Hawaii Standard
DST	Daylight Saving Time	On Off
BAT Warning	Issues a warning if the vehicle battery power drops below 11V.	On Off
BAT Saver	Turns off power to the LRD950 if the speed stays at 0 or if the GPS is not connected for more than an hour.	On Off
Selt Test	Runs a self diagnostic test on the unit to check for faults.	On Off
Factory Reset	Resets all settings except GMT to the factory defaults. <i>There is no confirmation request for reset.</i>	NA

MENU ITEM	WHAT IT DOES	SETTINGS
Mute Memory All Delete	Delete all saved Mute Memory points. A confirmation request displays.	NA
Firmware Version	Displays the latest firmware version.	NA
DB Version	Displays the latest database version	NA
EXIT	Closes the Menu system.	NA

BASIC OPERATIONS

HOW DO I ...?	TRY THIS...
Turn on the LRD950	Press POWER . The unit turns on and runs through an initial self-check. It displays the different bands and their settings. <i>The LRD950 turns on automatically when you start the vehicle.</i>
Adjust the volume	<ul style="list-style-type: none"> Press VOL + to increase volume. The unit beeps, announces "Volume (0 - 6)," and displays a number increase. Press VOL - to decrease volume. The unit beeps, announces "Volume (0 - 6)," and displays a number decrease.
Mute alarm volume during the alert	Press MUTE/DIM during an audio alarm to mute it. (This is especially useful in situations where the alert may be prolonged, such as at red lights.)
Change the screen's brightness	Press and hold MUTE/DIM . The LRD950 announces the brightness level (Bright, Dim, or Dark) as it changes to that level. Press and hold the keys again to cycle between the brightness levels.
Turn bands on and off	Press MENU and cycle through the menu options until the band you want to turn off displays. Press MENU again to change that band's status.
Change Highway to City and back	Press and hold both VOL + and VOL - for at least 1 second to alternate between HIGHWAY and CITY setting.
Set a user mark	Press MARK to create a user mark when you are at a location where there is normally some type of radar. The LRD950 announces "User mark logged." The LRD950 will announce when you approach user marks. <i>The LRD950 can save up to 200 user marks.</i>
Delete a user mark	Press MARK again at that location to delete the user mark. <i>The LRD950 does NOT ask for confirmation before deleting user marks.</i>
Delete ALL user marks	Press and hold MARK to delete all user marks. <i>The LRD950 DOES ask for confirmation before deleting all user marks.</i>
Update the firmware and database	Refer to LRD950 Firmware/Database Update Guide on www.uniden.com for details.

FEATURE DETAILS

USER MARKS (LASER AND RADAR SITES)

With the LRD950, you can mark geographical points where you commonly encounter radar transmissions, These can be school zones, red-light cameras, and places where police frequently monitor traffic.

When you are at the location, press **MARK**. The LRD950 announces "User mark logged." Now, when you approach these points, the LRD950 announces "User mark ahead."

Press and hold **MARK** at that location to delete that user mark.

The LRD950 holds up to 200 user marks.

HIGHWAY VS CITY MODE

Radar detectors operate with various sensitivity levels. These levels determine the types of signals and signal ranges (bands) detected. Highway mode is the most sensitive level while City mode is the least sensitive. If the X band is left on in City mode, a radar detector can pick up many X band signals (such as garage door openers) that generate false alerts. The LRD950 turns off the X band for City mode. When you are on the highway, there is less chance of picking up X band false alerts, so the LRD keeps the X band on.


Press and hold both **VOL +** and **VOL –** for at least 1 second to alternate between HIGHWAY and CITY mode.

POP MODE

In POP mode, the LRD950 can detect short burst from radars that are too fast for many other detectors to catch. You can turn POP mode on and off.

SCAN DISPLAY

A small dot on the screen indicates that the unit is scanning for **signals**. This dot travels back and forth in the middle of the screen. You can turn this display on and off in the Menu system.

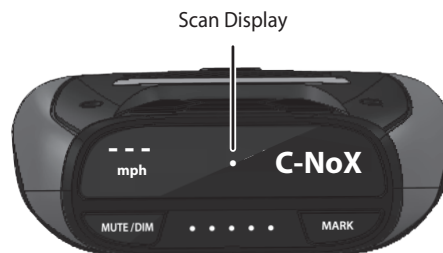

Elements on the screen vary according to what you turn on and off in the Menu system

ALARM PRIORITIES

- Speed Camera / Red Light Camera / User Mark Detect Alarm, POI Limit Speed Alarm
- Laser signal
- X, K, Ka Band signal
- User Limit Speed Alarm
- **Vehicle** Low Battery Voltage Warning, Vehicle Battery Saver Alarm

MUTE MEMORY

Use Mute Memory to mute known areas of false positive alarms (such as department store automatic doors). The LRD950 remembers where you muted the audio (GPS location) and the frequency you muted. It will automatically mute when you travel to that location and the saved frequency is detected; however, if a different frequency is detected, the LRD950 alerts to that different frequency.

When you press **MUTE/DIM** to mute audio for a specific location, *Mute On* displays. While *Mute On* displays, press **MUTE/DIM** again to save that GPS location to memory. *Mute Memory* displays on the screen.

LRD950 stores up to 100 Mute Memory points.

To delete Mute Memory points, press **MUTE/DIM** while *Mute Memory* displays. The LRD950 displays a delete confirmation message; press **MUTE/DIM** again to confirm. You can also delete Mute Memory points from *Menus/Delete All Mute?*

MAINTENANCE

MAINTAINING THE EQUIPMENT

The LRD950 requires very little physical maintenance. Wipe it with a soft cloth to keep dust from accumulating. Check the power cord connections to keep them clean and free of corrosion.

UPDATING THE FIRMWARE/DATABASE

Uniden recommends that you update your LRD950's firmware and database periodically. Go to www.uniden.com to check if you have the latest firmware. If you need to update your firmware, refer to LRD950 Firmware/Database Update Guide on www.uniden.com for details.

TROUBLESHOOTING

IF...	TRY THIS...
The unit won't turn on	Check the connections. Be sure they are all secure.
No display or audio.	<ul style="list-style-type: none"> • If no display, check the connections. Be sure they are all secure. • If no audio, check if Voice is turned off.
The unit alarms when the vehicle hits bumps.	Check the connections. Be sure they are all secure.
The unit alarms briefly in the same location but no radar source was in view.	There may be a motion sensor or house alarm in use within range.
The LRD950 did not alert when a police car was in view.	<ul style="list-style-type: none"> • The officer may not have radar/laser units turned on. • Check that the band is turned on. Press MENU and cycle through the options to get to the bands. If the band is turned off, the OLED will show OFF. Turn the band on.
The vehicle starts but the LRD950 does not turn on.	<ul style="list-style-type: none"> • Verify that the power cord is securely connected to the unit and inserted into the cigarette lighter jack. • Change the fuse in the power cord. Unscrew the cigarette lighter jack to access the fuse.

SPECIFICATIONS

Receiver Type:		Antenna Type:	
Radar	Double Conversion Superheterodyne Self-Contained Antenna	Radar	Linear Polarized E-vector Vertical
Laser	Pulsed Laser Signal Receiver	Laser Front	Convex Condenser Lens
Frequency:		Laser Back	Concave Condenser Lens
X	10.525 GHz	Dimensions	110.00 mm (D) x 69.00 mm (W) x 29.50 mm (H)
K	24.150 GHz	Weight	6 oz (170g)
Ka	33.400 - 36.000 GHz	Operating Temp.	-4° to +185° F (Radar/Laser) -20° to +85° C (Radar/Laser)
Laser	800 nm - 1100 nm	Storage Temp.	-22° to +203° F (Radar/Laser) -30° to +95° C (Radar/Laser)
Detector Type:		Operating Power Source	DC 11.0 to 16.0 V
Radar	Scanning Frequency Discriminator	USB Interface	USB Specification 2.0/1.1
Laser	Pulse Width Discriminator		
Alarm Type	Beep (Detected Band and Signal strength)		

FCC/Industry Canada Information

FCC: AMW-LRD950

ICC: 513C-LRD950

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Unauthorized changes or modifications to this equipment may void compliance with the FCC Rules. Any change or modification must be approved in writing by Uniden. Changes or modifications not approved by Uniden could void the user's authority to operate the equipment.

L'appareil est conforme aux normes d'Industrie Canada. Son fonctionnement est soumis aux deux conditions suivantes : (1) Ce dispositif ne doit pas causer d'interférences et (2), il doit pouvoir accepter les interférences, incluant celles pouvant nuire à son fonctionnement normal.

Tous les changements apportés à cet appareil, s'ils ne sont pas expressément approuvés par Uniden ou toute utilisation de celui-ci d'une autre manière que celle décrite dans ce guide peut annuler votre autorisation de le faire fonctionner.

ONE-YEAR LIMITED WARRANTY

Keep your receipt! Proof of purchase is required for warranty service.

WARRANTOR: UNIDEN AMERICA CORP. ("Uniden")

ELEMENTS OF WARRANTY: Uniden warrants, for one year, to the original retail owner, this Uniden Product to be free from defects in materials and craftsmanship with only the limitations or exclusions set out below.

WARRANTY DURATION: This warranty to the original user shall terminate and be of no further effect 12 months after the date of original retail sale. The warranty is invalid if the Product is (A) damaged or not maintained as reasonable or necessary, (B) modified, altered, or used as part of any conversion kits, subassemblies, or any configurations not sold by Uniden, (C) improperly installed, (D) serviced or repaired by someone other than an authorized Uniden service center for a defect or malfunction covered by this warranty, (E) used in any conjunction with equipment or parts or as part of any system not manufactured by Uniden, or (F) installed or programmed by anyone other than as detailed by the Operating Guide for this product.

STATEMENT OF REMEDY: In the event that the product does not conform to this warranty at any time while this warranty is in effect, warrantor will repair the defect and return it to you without charge for parts, service, or any other cost (except shipping and handling) incurred by warrantor or its representatives in connection with the performance of this warranty. THE LIMITED WARRANTY SET FORTH ABOVE IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO THE PRODUCT AND IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES OF ANY NATURE WHATSOEVER, WHETHER EXPRESS, IMPLIED OR ARISING BY OPERATION OF LAW, INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY DOES NOT COVER OR PROVIDE FOR THE REIMBURSEMENT OR PAYMENT OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow this exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you.

LEGAL REMEDIES: This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. This warranty is void outside the United States of America.

PROCEDURE FOR OBTAINING PERFORMANCE OF WARRANTY: If, after following the instructions in this Operating Guide, you are certain that the Product is defective, pack the Product carefully (preferably in its original packaging). Include evidence of original purchase and a note describing the defect that has caused you to return it. The Product should be shipped freight prepaid, by traceable means, or delivered, to warrantor at:

Uniden America Corporation
C/O Saddle Creek
743 Henrietta Creek Rd., Suite 100
Roanoke, TX 76262
(800) 297-1023, 8 a.m. to 4:30 p.m., Central, Monday through Friday

POP Mode is a trademark of MPH Industries, Inc.

